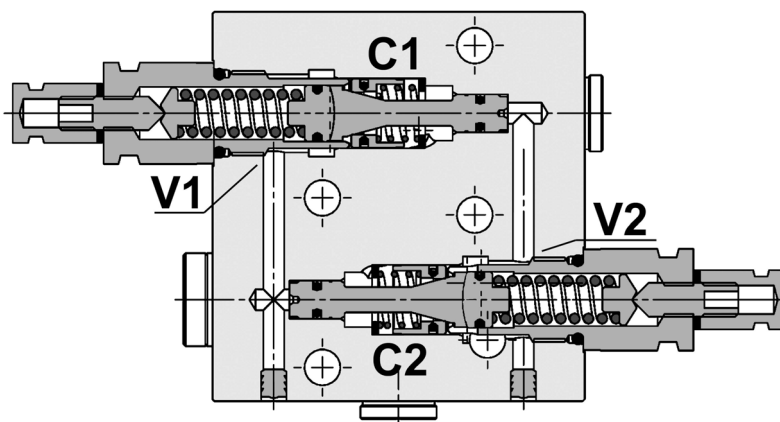



Valvola overcenter doppia, flangiabile su motori Danfoss serie "OMP/R/H", con sblocco freno
Dual overcenter valve, flangeable on Danfoss motors "OMP/R/H" series, brake release port

Rev.03-2010/08

**SPECIFICHE TECNICHE**

Materiali: cartucce in acciaio zincato, parti interne in acciaio trattato termicamente. Corpo in lega di alluminio.

Portata max.: fino a 50 l/min

Taratura max.: 350 bar

Pressione max: 250 bar

Rapporto di pilotaggio: 1 : 4.25 standard, a richiesta 1 : 8, 1 : 11

Regolazione pressione: mediante vite

Campo di regolazione pressione: vedere pag. 02

Peso: 1,500 Kg

TECHNICAL SPECIFICATIONS

Materials: cartridges in steel zinc plated, internal parts in hardened steel. Body is in high strength aluminium alloy.

Rated flow: up to 50 l/min

Max. setting: 350 bar

Max. pressure: 250 bar

Pilot ratio: 1 : 4.25 std, 1 : 8 and 1 : 11 on request

Adjustment means: leakproof screw adjustment

Adjustable pressure range: see page 02

Weight: 1,500 Kg

DIAGRAMMA PERDITE DI CARICO - PRESSURE DROP CURVES

Viscosità olio 24 mm²/sec. (3,5 °E)
 Temperatura 50 °C

Oil viscosity 24 mm²/sec. (3,5 °E)
 Temperature 50 °C

